

COLOUR CHART

TILE GROUT

FLOOR TILE GROUT

EPOXY TILE GROUT

SANITARY SILICONE

SILICONE E

KIILTO PRO TILE GROUT


A water-repellent tile grout for tiles and clinker on walls and floors.

- joint width 1–6 mm
- for exterior and interior areas
- coverage 0,5–1,5 kg/m² depending on joint dimensions
- water- and dirt-repellent



KIILTO PRO SANITARY SILICONE


An anti-mould, odourless and neutral silicone for movement joints and sealing. Suitable for interior and exterior use.

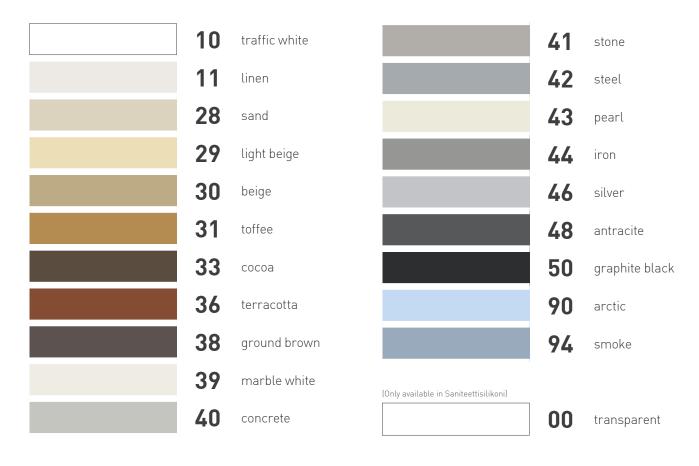

M1>

KIILTO PRO SILICONE E SANITARY SILICONE

An anti-mould, acetic acid based silicone for sealing movement joints of ceramic tiles, wall to floor junctions and joints between different materials as well as penetrations in wet areas. Also for exterior areas.

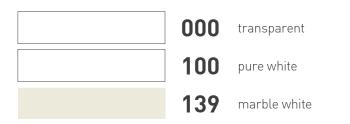





KIILTO PRO FLOOR TILE GROUT

A fast-setting tile grout for clinker tiles and stone.

- joint width 2–12 mm
- easy-to-apply, can be washed off soon after grouting
- for interior and exterior areas
- water- and dirt-repellent



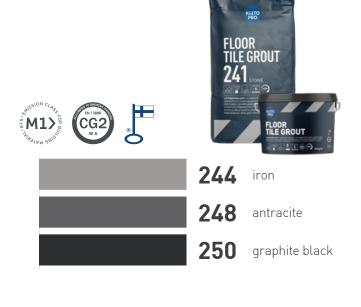


KIILTO PRO EPOXY TILE GROUT

Two-component epoxy tile grout for ceramic tiles in interior and exterior areas. Gives a waterproof joint with excellent wearand chemical resistance. Suitable also for fixing ceramic tiles.

- waterproof
- excellent resistance to mechanical wear and chemicals
- joint width 2–12 mm
- for professional use







CE

M1>



CUSTOMER SERVICE

We will help you in the selection of the right products, and in questions regardingright working conditions and methods.

Weekdays 8.00 am - 4.00 pm

Customer service: +358 (0)207 710 100 customerservice@kiilto.com

Please note that the printed colour card may vary from the actual colour due to the printing technology used.

kiilto.fi